


## 6 Way Plug Wiring Diagram

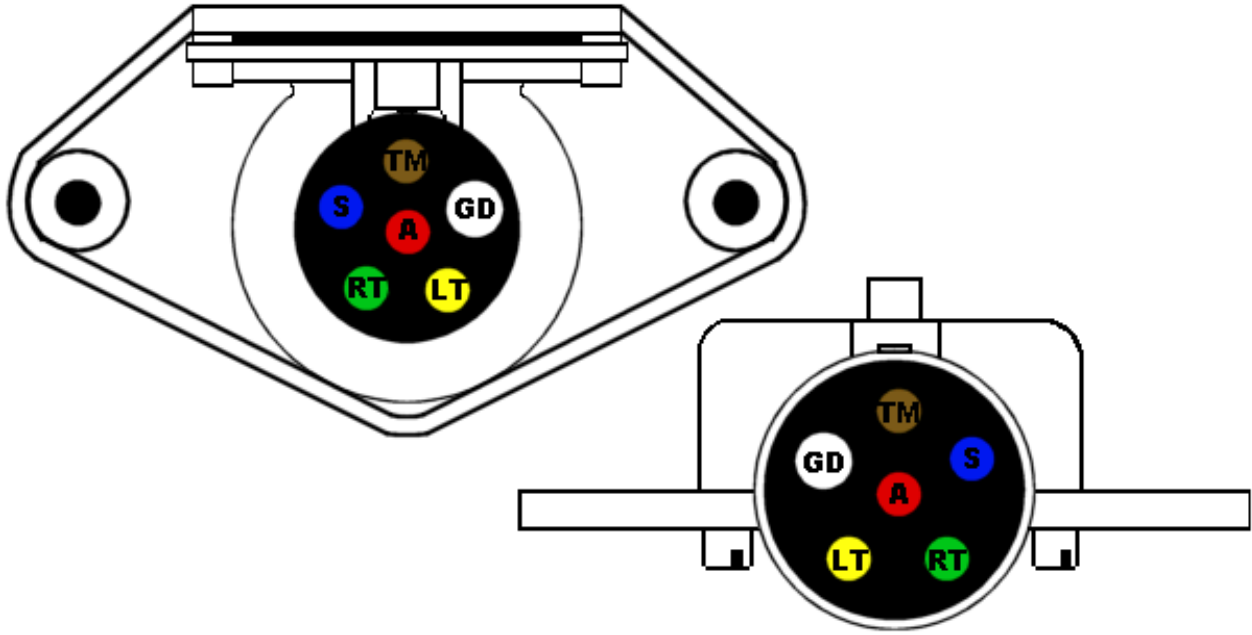

### Standard Wiring\*

Post	Purpose	Wire Color
TM	Park Lights	Brown
GD	Ground	Black (or White)
S	Trailer Brakes	Blue
LT	Left Turn/Brake Light	Yellow
RT	Right Turn/Brake Light	Green
A	Accessory	Red

The most common variances on this diagram will be the (blue/brake) & (red/Acc.) wires will be inverted. If there is **no** red or blue wire and there is **both** a black & a white wire, **normally**, the black will be brakes and the white ground.

\* Always test wires for function and wire accordingly. This wiring scheme is for reference only.