


7 Way Plug Wiring Diagram

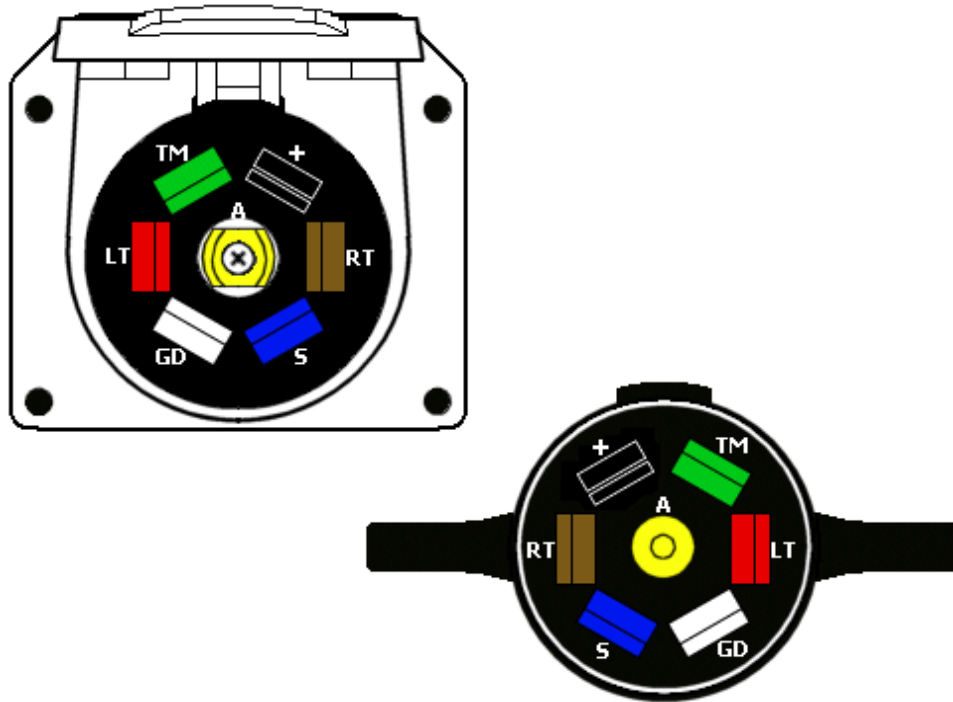

Standard Wiring*

| Post | Purpose | Wire Color |
|------|-------------------------|------------|
| TM | Park Light | Green |
| (+) | Battery Feed | Black |
| RT | Right Turn/Brake Light | Brown |
| LT | Left Turn/Brake Light | Red |
| S | Trailer Electric Brakes | Blue |
| GD | Ground | White |
| A | Accessory | Yellow |

This is the most common (Standard) wiring scheme for RV Plugs and the one used by major auto manufacturers today.

* Always test wires for function and wire accordingly. This wiring scheme is for reference only.